


CONNECTOR:XF2L-0625-1A
(6-pin, Pitch=0.5mm, top contact)

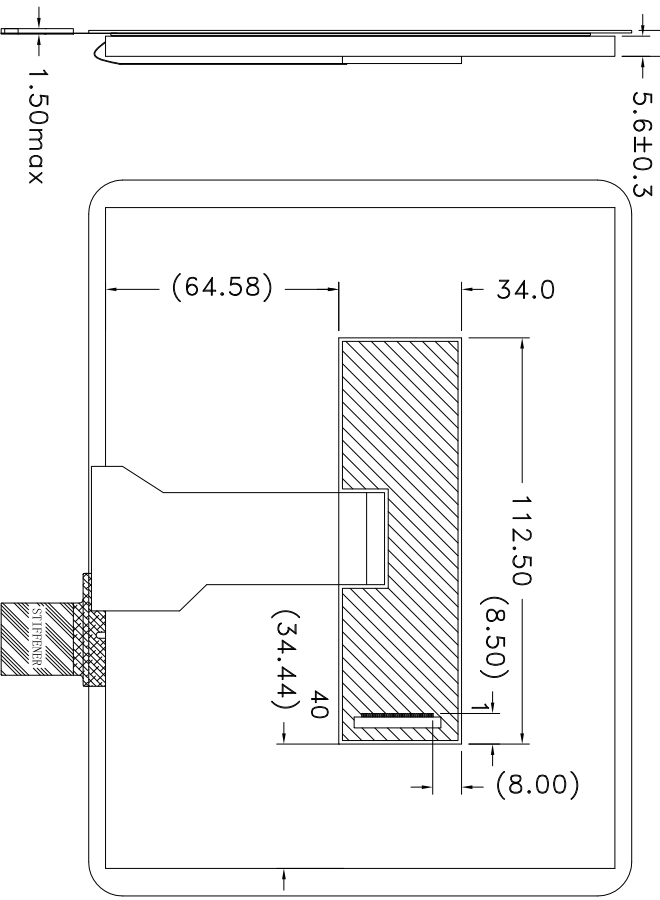

No:	PIN NAME
1	GND
2	VDD
3	AVDD
4	RESET
5	CS
6	RS
7	WR
8	RD
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15
25	NC
26	GND
27	NC
28	NC
29	NC
30	GND
31	AGND
32	AGND
33	AVDD
34	AVDD
35	LED_A
36	LED_K
37	YU (NC)
38	XL (NC)
39	YD (NC)
40	XR (NC)

NOTES:

- 1.DISPLAY TYPE: a-Si TFT
- 2.POLARIZER MODE:TRANSMISSIVE,Normally White
- 3.OPERATING TEMP:-10°C ~ 60°C
- 4.STORAGE TEMP:-20°C ~ 70°C
- 5.BACKLIGHT: LED
- 6.RoHS Complicant

TP PIN DEFINE

1	GPIO156_TOUCH_RST_N
2	GPIO157_TOUCH_INT
3	I2C2_SDA
4	I2C2_SCL
5	GND
6	VDD_TP_3V3

DRAWN BY:	TITLE:	SCALE:
CHECKED BY:	DWG NO.:	UNIT: mm
APPROVED BY:	DWG NAME:	SHEET NO. OF
CONFIRMED BY:		