
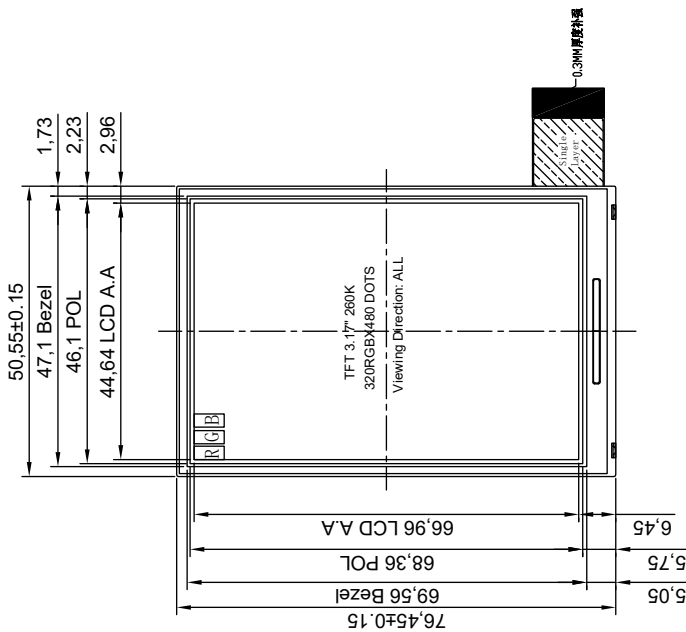


PIN ASSIGNMENT	
1	A
2	K
3	NC
4	NC
5	NC
6	NC
7	NC
8	VCC
9	GND
10	NC
11	NC
12	/CS
13	/RS
14	RD
15	/WR
16	/RESET
17	DB0
18	DB1
19	DB2
20	DB3
21	DB4
22	DB5
23	DB6
24	DB7

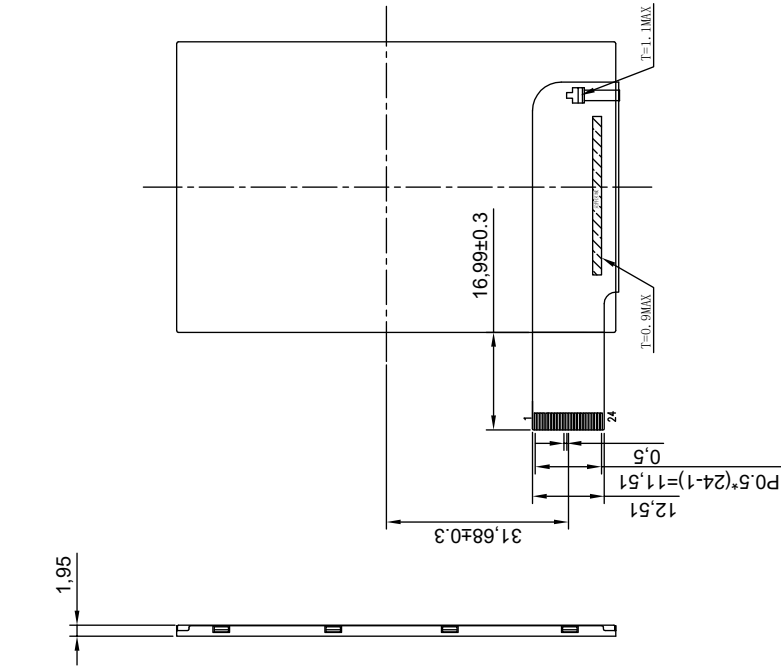

BACKLIGHT CIRCUIT

NOTES:

- 1.DISPLAY TYPE: 262K TFT,TRANSELECTIVE
- 2.BACKLIGHT: 6CHIP-WHITE LED, Series connection
- 3.Unspecified Tolerances is :±0.20mm.
- 4.Driver IC:NT35399
- 5.Operating Temperature : -10°C --- +60°C
- 6.Storage Temperature : -20°C --- +70°C
- 7.ROHS COMPLIANCY

DRAWN BY:	TITLE: I		SCALE:	UNIT: mm
CHECKED BY:	DWG NO:			
APPROVED BY:	DWG NAME:			
CONFIRMED BY:	SHEET NO:			OF