



PIN	FUNCTION
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	NC
33	NC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

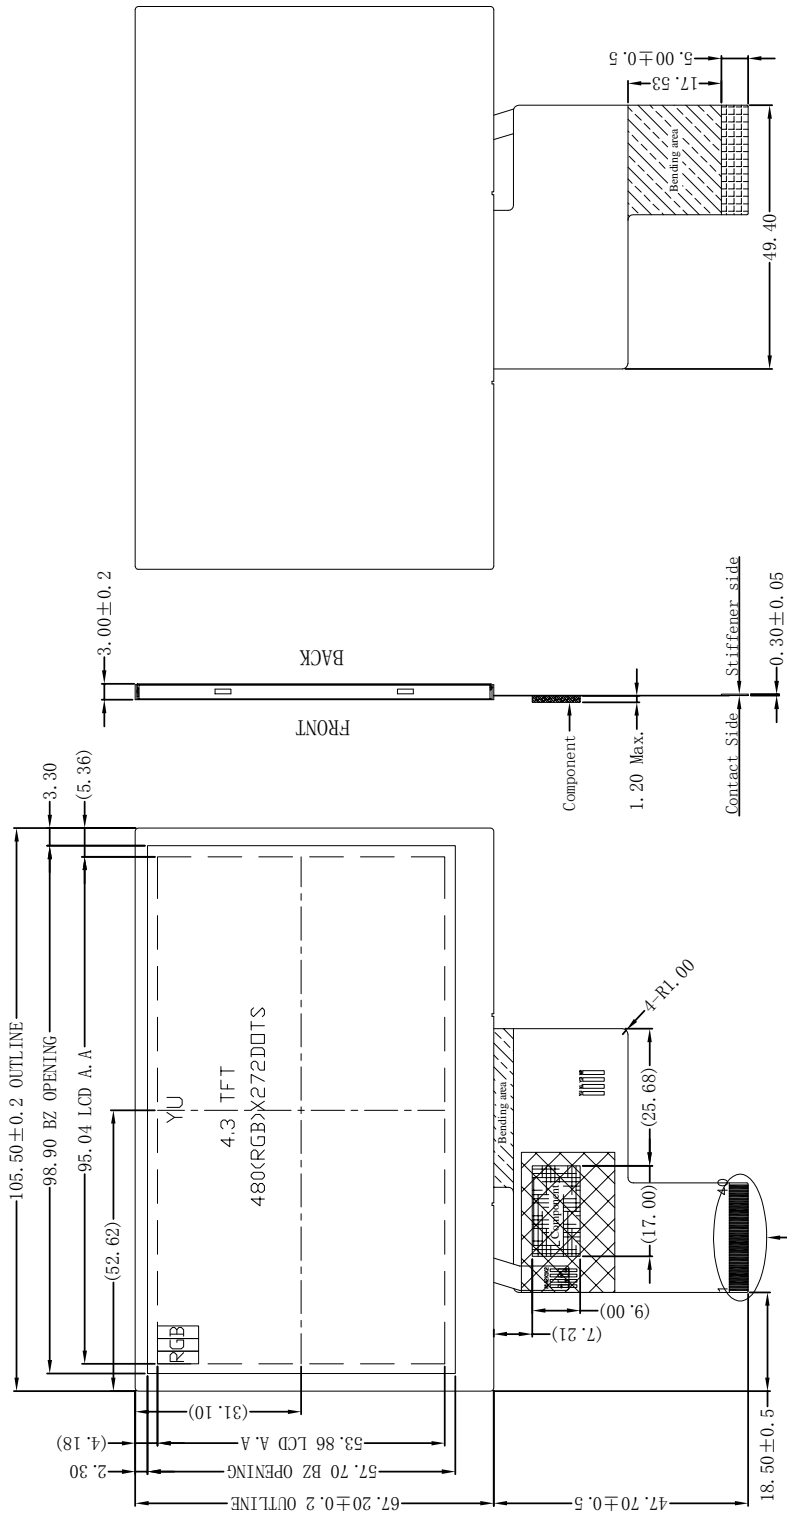

LED CIRCUIT DIAGRAM:



NOTES:

1. DISPLAY TYPE: 4.3TFT, Transflecti
2. VIEWING DIRECTION : 12 O' CLO
3. Driver IC : ILI64
4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80
5. GENERAL TOLERANCE: ±0
6. RoHS Compliant

DETAIL A (2:1)

DRAWN BY:	TITLE:	SCALE:	mm
CHECKED BY:	DWG NO:	UNIT:	OF
APPROVED BY:	DWG NAME:	SHEET NO:	
CONFIRMED BY:			