
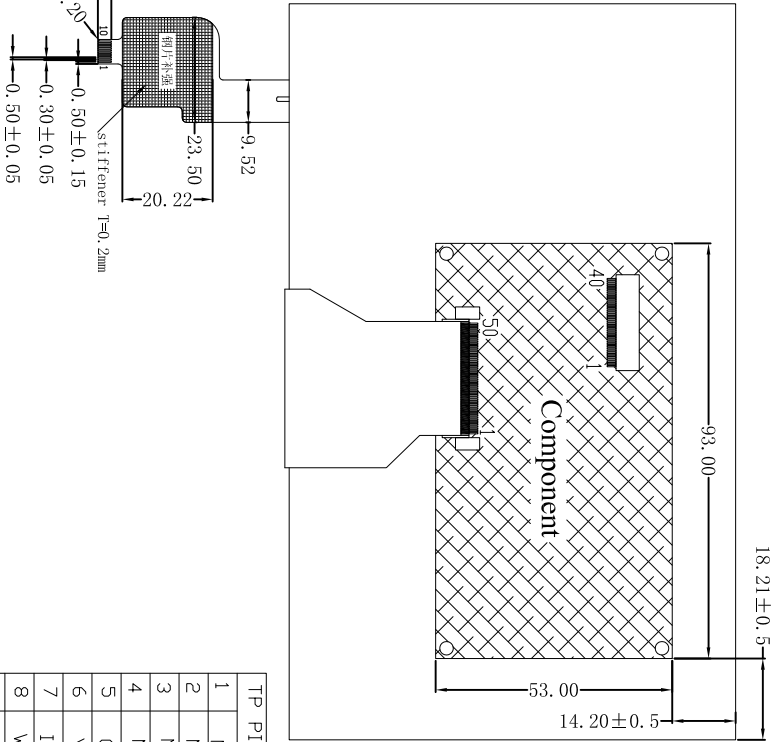
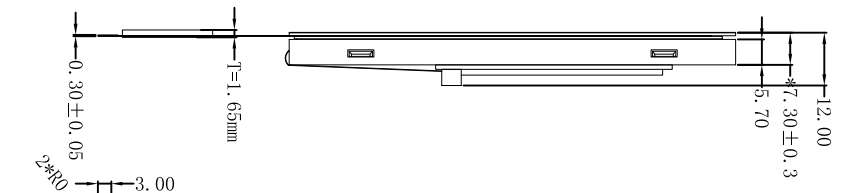



40PIN:

1	VDD	29	G2
2	VDD	30	G3
3	NC	31	G4
4	GND	32	G5
5	GND	33	G6
6	VCC	34	G7
7	VCC	35	G8
8	NC	36	G9
9	DE	37	G10
10	VS	38	G11
11	HS	39	G12
12	GND	40	G13
13	B5		
14	B4		
15	B3		
16	GND		
17	B2		
18	B1		
19	B0		
20	GND		
21	G5		
22	G4		
23	G3		
24	GND		
25	G2		
26	G1		
27	G0		
28	GND		
29	R5		
30	R4		
31	R3		
32	GND		
33	R2		
34	R1		
35	R0		
36	GND		
37	DCLK		
38	GND		
39	GND		
40	GND		

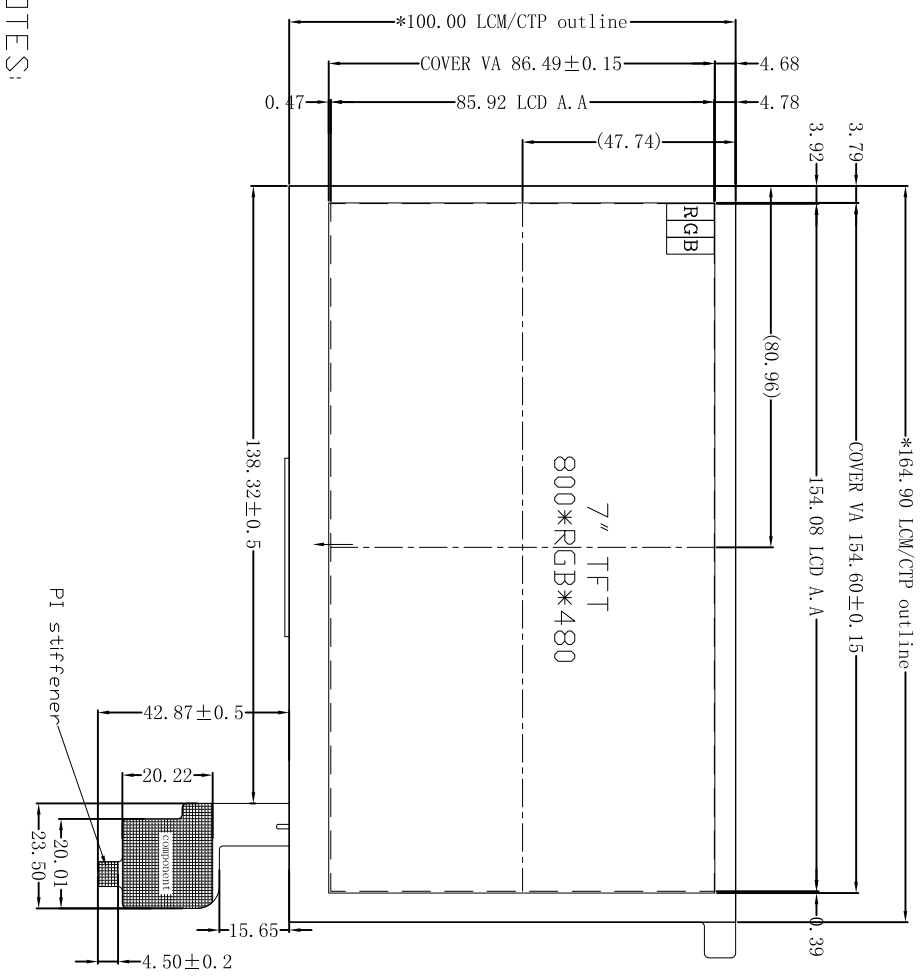

- NOTES:
- 1.DISPLAY TYPE: a-si TFT
 - 2.DISPLAY MODULE :Transmissive,POSITIVE
 - 3.OPERATING TEMP: -20°C ~ 70°C
 - 4.STORAGE TEMP: -30°C ~ 80°C
 - 5.BACKLIGHT: LED
 - 6.IMPORTANT DIMENSION MARK:*
 - 7.ROHS Compliant

LED CIRCUIT DIAGRAM:

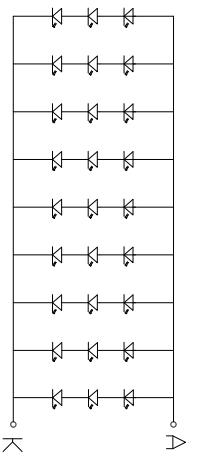

DRAWN BY:	TITLE:	SCALE:	UNIT:
CHECKED BY:	DWG NO:	mm	
APPROVED BY:	DWG NAME:	SHEET NO:	OF
CONFIRMED BY:			